


CARATTERISTICHE TECNICHE | DATA SHEET

DONNÉES TECHNIQUES | TECHNISCHE DATEN

BF 15F - 25F - 35F

INSACCATRICI IDRAULICHE VERTICALI / VERT. HYDRAULIC SAUSAGE FILLERS
POUSOIRS À SAUCISSE HYDRAULIQ. VERT. / HYDRAULISCHER WURST-FÜLLER VERTIKAL

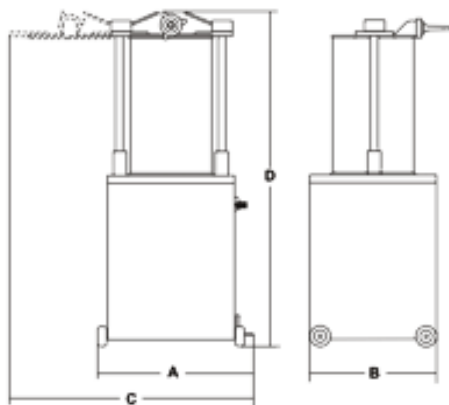

SPECIFICHE SPECIFICATIONS SPÉCIFICATIONS TECHNISCHE MERKMALE				DIMENSIONI DIMENSIONS MASSE		
	BF+15FT	BF+25FT	BF+35FT	BF+15FT	BF+25FT	BF+35FT
Capacità Capacity Capacité Kapazität	15	25	35	A 490 mm	A 565 mm	A 640 mm
Posizione di lavoro Working position Position de travail Arbeitsposition	pavimento/floor à poser/Fußboden					
Lung. cilindro Cylinder length Long. Cylindre Länge Zylinder	499	460	460	B 370 mm	B 450 mm	B 480 mm
Ø cilindro Ø cylinder Ø cylindre Ø Zylinder	200	260	320			
Lung. pistone Piston length Long. Piston Länge Kolben	430	380	380	C 700 mm	C 950 mm	C 1000 mm
Ø beccucci forniti Ø supplied nozzle Ø embouts fournis Ø mitgelieferte Mundstücke	10, 18, 25	10, 18, 25	10, 18, 25			
Motore (HP/W) Motor (HP/W) Moteur (HP/W)	0,7/520	0,7/520	0,7/520	D 1200 mm	D 1160 mm	D 1160 mm
Velocità min. svuot. Min. emptying speed Vitesse min vidage vidage Min Entleerungsgeschwindigkeit	2'11"	2'02"	2'02"			
Velocità max. svuot. Max emptying speed Vitesse max vidage Geringste Entleerungsgeschwindigkeit	59"	51"	51"			
Velocità ritorno pistone Piston return speed Vitesse retour piston Kolbenrückkehrgeschwindigkeit	35"	32"	32"			
Peso Net weight Poids net Nettogewicht	53 kg	91 kg	101 kg			

Note: A seguito della continua ricerca per migliorare sempre i nostri prodotti, le specifiche tecniche sono soggette a possibili variazioni

Note: As we actually strive to improve our products, specifications are necessarily subject to change without notice

Remarque: En raison de la recherche continue pour améliorer nos produits, les spécifications techniques sont sujettes à des possibles variations

Anmerkung: Aufgrund der ständigen Forschung für die Verbesserung unserer Produkte, die Produktionsvorgabe können Änderungen zeigen